


Cam follower CF5-R-IKO - CF5-R-IKO

<https://www.123bearing.ie/bearing-housing/deep-groove-bearing/cam-follower/cf5-r-iko>



CAM FOLLOWERS

Standard Type Cam Followers With Cage/With Screwdriver Slot

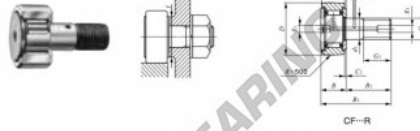

| Stud dia. mm | Identification number | | | | Mass (Ref.) | | | | |
|-----------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|---|----------------|---------|
| | Shield type | | Sealed type | | g | D | C | d ₁ | G |
| | With crowned outer ring | With cylindrical outer ring | With tapered outer ring | With cylindrical outer ring | | | | | |
| 5 | CF | 5 | R | | 10.3 | 13 | 9 | 5 | M 5×0.8 |

| Boundary dimensions mm | | | | | | | | | | | | | |
|------------------------|----|----------------|----------------|----------------|----------------|----------------|----------------|--------------------------------|------------------------------------|---|-------------------------------------|-------|-------|
| G ₁ | B | B ₁ | B ₂ | B ₃ | C ₁ | G ₁ | G ₂ | f ^(*) Min. mm | Maximum ignoring stress C | Static load rating C ₀ | Maximum allowable static load | | |
| 7.5 | 10 | 23 | 13 | — | 0.5 | *3.1 | — | 0.3 | 9.3 | 1.6 | 2 520 | 2 140 | 1 260 |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3663952440910 |
| Inside diameter | 5 mm |
| Outside diameter | 13 mm |
| Thickness | 9 mm |
| Packaging | 1 |

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE