


Cam follower CFE10-VBUUR-IKO - CFE10-VBUUR-IKO

<https://www.123bearing.ie/bearing-housing/deep-groove-bearing/cam-follower/cfe10-vbuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

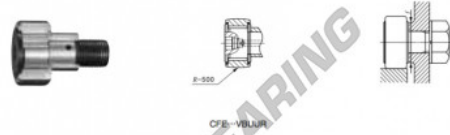

Outside diameter of outer ring mm	Identification number						Mass (Ref.)		
	Shield type		Sealed type		g	D	C	d _e	
13	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	50.5	22	12	13	
	CFE 10		VBUUR						

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum splining torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
G	B ₃	B ₁ max	B ₂ max	C ₁	G ₁	g ₁	H	Excentricity e	Flange diameter						
M10 × 1.25	10.5	13.2	36.2	23	0.6	—	12.5	4	0.3	0.4	16	13.8	9 570	14 500	8 650

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460400
Inside diameter	13 mm
Outside diameter	22 mm
Thickness	12 mm
Weight	50.5 g
Packaging	1

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE