


Cam follower CRH9-VB-IKO - CRH9-VB-IKO

<https://www.123bearing.ie/bearing-housing/deep-groove-bearing/cam-follower/crh9-vb-iko>

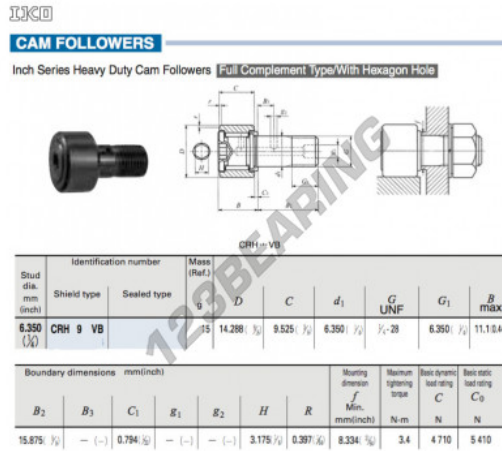

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	D	C	d ₁	G UNF	G ₁	B max
	Shield type	Sealed type							
6.350 (.250)	CRH 9 VB		15	14.288 $\frac{1}{2}$	9.525 $\frac{3}{8}$	6.350 $\frac{1}{4}$	7/16-28	6.350 $\frac{1}{4}$	11.1844

Boundary dimensions mm(inch)								Mounting dimension F Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N
B ₂	B ₃	C ₁	S ₁	S ₂	H	R					
15.875 $\frac{1}{2}$	- (-)	0.794 $\frac{1}{4}$	- (-)	- (-)	3.175 $\frac{1}{8}$	0.397 $\frac{1}{64}$	8.334 $\frac{1}{4}$	3.4	4710	5410	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464361
Inside diameter	6.35 mm
Outside diameter	14.288 mm
Thickness	9.525 mm
Weight	15 g
Packaging	1

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE