


## Drawn cup roller bearing BA167-Z-IKO - BA167-Z-IKO

<https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/ba167-z-iko>

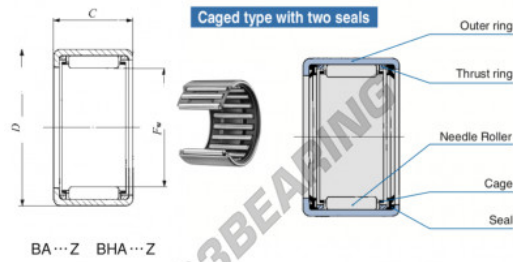

Boundary dimensions		mm[inch]		Standard mounting dimensions				mm		Basic dynamic	Basic static	Allowable	Assembled
<i>F<sub>or</sub></i>	<i>D</i>	<i>C</i>	<i>c<sub>2</sub></i>	Shaft dia.	<i>t<sub>6</sub></i>	Housing bore dia.	<i>J<sub>7</sub></i>	<i>C</i>	<i>C<sub>B</sub></i>	load rating	load rating	rotational	inner ring
			Max.	Max.	Min.	Max.	Min.	N	N			rpm	
25.400	31.750	11.4	11.13	438	2.8					7720	11100	15000	—

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601155
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	11.13 mm
Limiting speed	15000 rpm
Dynamic load	7.72 kN
Static load	11.1 kN
Packaging	1

[contact@123bearing.ie](mailto:contact@123bearing.ie)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE