


Drawn cup roller bearing BA1620-Z-IKO - BA1620-Z-IKO

<https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/ba1620-z-iko>

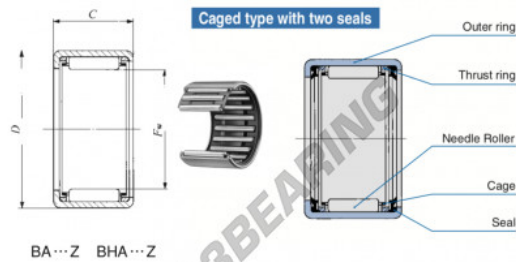

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic		Basic static		Allowable	Assembled
F_w	D	C	d	h_1	d_1	load rating		load rating		rotational	inner ring	
			Max.	Max.	Min.	Max.	Min.	N	N	rpm		
25.400 (1.0)	31.750 (1.250)	31.751 (1.250)	25	2.6				24400	48500	15000	IRB 1220	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601216
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	31.75 mm
Limiting speed	15000 rpm
Dynamic load	24.4 kN
Static load	48.5 kN
Packaging	1

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE