


Drawn cup roller bearing BA2020-Z-IKO - BA2020-Z-IKO

<https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/ba2020-z-iko>

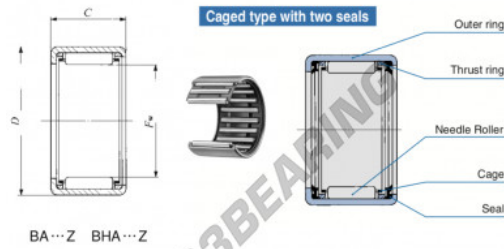

| Boundary dimensions mm[inch] | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | | Basic static load rating | | Allowable rotational speed | | Assembled inner ring |
|------------------------------|--------|--------|---------------------------------|--------|------|------|---------------------------|-------|--------------------------|-------|----------------------------|--|----------------------|
| F_w | D | C | d | h_0 | JT | C | C_0 | n | n_0 | n | n_0 | | |
| | | | Min. | Max. | Max. | Min. | | rpm | rpm | rpm | rpm | | |
| 31.750 | 11.141 | 38.100 | 11.212 | 31.750 | 2.00 | | | 26900 | 59200 | 12000 | 1620 | | |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060601353 |
| Inside diameter | 31.75 mm |
| Outside diameter | 38.1 mm |
| Thickness | 31.75 mm |
| Limiting speed | 12000 rpm |
| Dynamic load | 26.9 kN |
| Static load | 59.2 kN |
| Packaging | 1 |

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE