


Drawn cup roller bearing BA3220-Z-IKO - BA3220-Z-IKO

<https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/ba3220-z-iko>

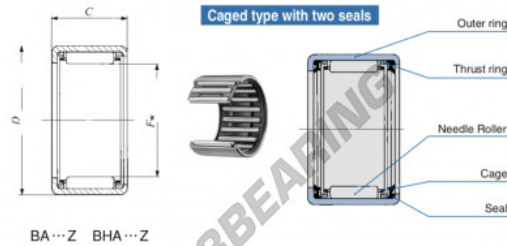

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed ⁽¹⁾ | Assembled inner ring |
|------------------------------|---------------|---------------|---------------------------------|------|------|------|---------------------------|--------------------------|---|----------------------|
| F_w | D | C | d | H | J | C' | C_0 | | | |
| 50.800 (2) | 60.325 (2 #8) | 31.75 (1.250) | 2.8 | | | | | | | |
| | | | Max. | Max. | Min. | Max. | Min. | N | N | |
| | | | | | | | | rpm | mm B 2720 | |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060601599 |
| Inside diameter | 50.8 mm |
| Outside diameter | 60.325 mm |
| Thickness | 31.75 mm |
| Limiting speed | 6000 rpm |
| Weight | 128 g |
| Dynamic load | 46.6 kN |
| Static load | 102 kN |
| Packaging | - |
| Standard | No standard |

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE