


Drawn cup roller bearing BA1416-Z-IKO - BA1416-Z-IKO

<https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/ba1416-z-iko>

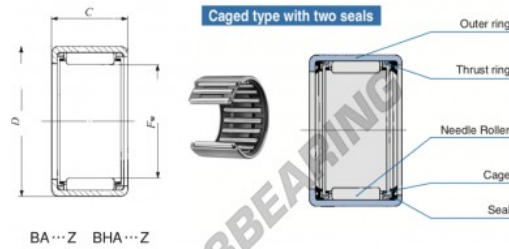

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	Shaft dia. d		Housing bore dia. D_f	C	CF	rpm		
			Max.	Min.	Max.	Min.	N	N		
22.025 (0.86)	28.575 (1.12)	25.40 (1.000)	22.225	22.212	28.587	28.566	17600	30500	18000	RB 1016

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603326
Inside diameter	22.225 mm
Outside diameter	28.575 mm
Thickness	25.4 mm
Limiting speed	18000 rpm
Dynamic load	17.6 kN
Static load	30.5 kN
Packaging	1

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE