Drawn cup roller bearing
BAM1010-IKO - BAM1010-IKO

https://www.123bearing.ie/bearing-housing/needle-roller-bearing/drawn-cup/bam1010-iko

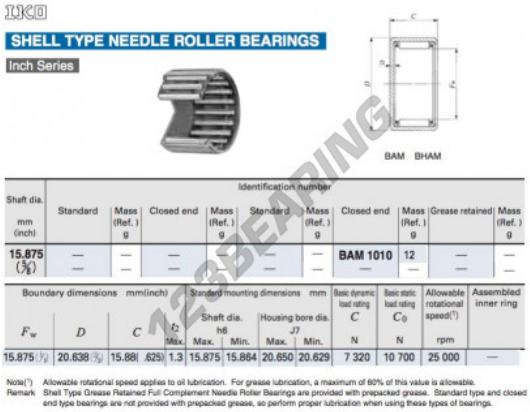

IKO

SHELL TYPE NEEDLE ROLLER BEARINGS

Inch Series

BAM BHAM

Shaft dia. mm (inch)	Identification number: Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
15.875 (5/8)	—	—	—		—	—	BAM 1010	12	—	—
	—	—	—		—	—	—	—	—	—

Boundary dimensions mm(inch) F_w	D	C	r_2 Max.	Standard mounting dimensions mm: Shaft dia. h6 Max.	Shaft dia. h6 Min.	Housing bore dia. J7 Max.	Housing bore dia. J7 Min.	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed(*) rpm	Assembled inner ring
15.875 (5/8)	20.638 (13/16)	15.88 (.625)	1.3	15.875	15.864	20.650	20.629	7 320	10 700	25 000	—

Note(*) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.
Remark Shell Type Grease Retained Full Complement Needle Roller Bearings are provided with prepacked grease. Standard type and closed end type bearings are not provided with prepacked grease, so perform proper lubrication when using these types of bearings.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952172897
Inside diameter	15.88 mm
Outside diameter	20.64 mm
Thickness	15.88 mm
Packaging	1

contact@123bearing.ie
+33 359 36 04 90
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE