


Cam follower CFES6-BR-IKO - CFES6-BR-IKO

<https://www.123bearing.ie/bearing-housing/deep-groove-bearing/cam-follower/cfes6-br-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Hexagon Hole

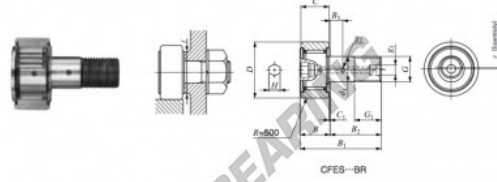

Stud dia. mm	Identification number						Mass (Ref.)		
	Shield type		Sealed type		g	D	C	d ₁	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring					
6	CFES 6 BR				18.5	16	11	6	

Boundary dimensions mm										
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	g ₁	g ₂	H	ε
M 6×1	8	12.2	28.2	16	—	0.6	—	—	3	0.25

Mounting dimension f	Maximum spinning torque	Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load
Min. mm	N·m	N	N	N
11	2.7	3 660	3 650	1 980

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443362
Inside diameter	6 mm
Outside diameter	16 mm
Thickness	11 mm
Packaging	1

contact@123bearing.ie

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE