

# TAPR Rod end


## GIHL-K60-DO-DURBAL - GIHL-K60-DO-DURBAL

<https://www.123bearing.ie/bearing-housing/rod-end/tapr/gihl-k60-do-durbal>

### GIHL-K60-DO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

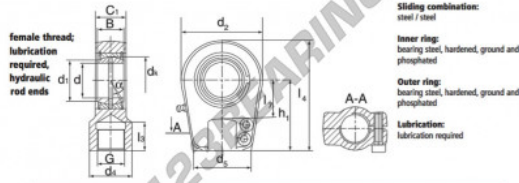

**Sliding combination:**  
steel / steel

**Inner ring:**  
bearing steel, hardened, ground and phosphated

**Outer ring:**  
bearing steel, hardened, ground and phosphated

**Lubrication:**  
lubrication required

order number	d	d <sub>1</sub>	G	d <sub>2</sub>	d <sub>3</sub>	B	C <sub>1</sub>	d <sub>4</sub>
right hand thread								
left hand thread								
<b>GIHL-K 60 DO</b>	60	66,8	M 58 x 1,5	75	120	44	50	130

type	l <sub>1</sub> min	l <sub>2</sub> min	h <sub>1</sub>	h <sub>2</sub>	l <sub>4</sub>	d <sub>5</sub>	α [°]	load rating C <sub>0</sub> [N]	weight [kg]
<b>GIHL-K / GIHL-K 60 DO</b>	59	65	130	200,0	66,0	6	6	400	5,40

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499239
Inside diameter	60 mm
Outside diameter	130 mm
Thickness	50 mm
Type	TAPR
Weight	5400 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.ie](mailto:contact@123bearing.ie)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE