

# TAPR Rod end GIHN-KL-100LO-DURBAL - GIHN-KL-100LO-DURBAL


<https://www.123bearing.ie/bearing-housing/rod-end/tapr/gihn-kl-100lo-durbal>

## GIHN-KL-100LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

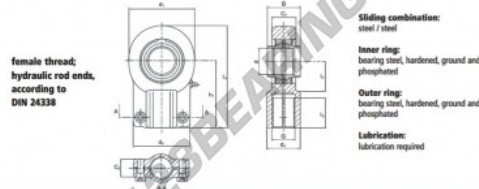

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number		measurement [mm]										
right hand thread	left hand thread	d	d <sub>1</sub>	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	
	<b>GIHN-KL 100 LO</b>	100	210	M 80 x 3	110,0	178	100	84	62			

type	l <sub>1</sub> min	measurement [mm]			load rating	weight
		h	l <sub>2</sub>	l <sub>3</sub>	C <sub>0</sub> [kN]	[kg]
GIHN-K / GIHN-KL 100 LO	96	210	322,0	98	1060,0	28,00

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500485
Inside diameter	100 mm
Outside diameter	210 mm
Thickness	84 mm
Type	TAPR
Weight	28000 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.ie](mailto:contact@123bearing.ie)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE