


## Tapered roller bearing 45252-JTEKT - 45252-JTEKT

<https://www.123bearing.ie/bearing-housing/roller-bearing/tapered/45252-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

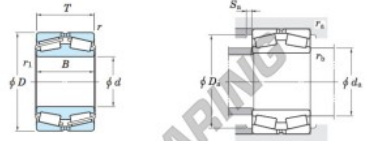

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
260	400	104	104	4	5	1 140	2 120	610	810

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>	
45252	302	382	360	6	3	4	0.25	2.74	4.08	2.68	48.1

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481982
Inside diameter	260 mm
Outside diameter	400 mm
Thickness	104 mm
Weight	48100 g
Packaging	1

[contact@123bearing.ie](mailto:contact@123bearing.ie)

+33 359 36 04 90

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE